


ADVANCED DESIGN FOR HANGER INSTALLATION BEFORE DRYWALL

The **Fire Wall Hanger (FWH)** is the industry's most labor-saving solution for attaching floor framing to 2-hour fire-rated walls in wood frame construction.

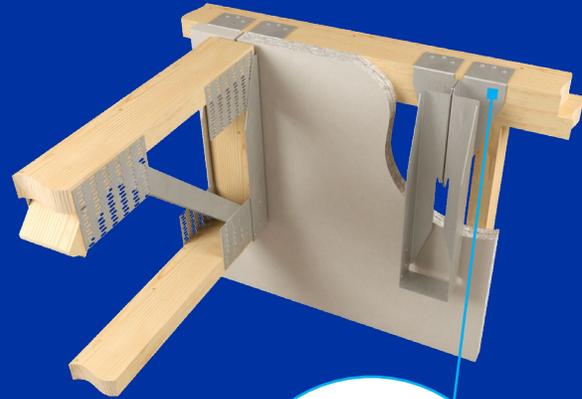

This galvanized FWH is patented and has a high capacity. It is the only one that has undergone load testing without sheathing prior to attaching drywall for complete installation.

FEATURES & BENEFITS

- Installs with common 10d nails for more convenience, before drywall is attached.
- Driving point marks slot location on drywall – no measuring needed.
- Thin, 14 gauge steel causes less obstruction/floor bump than competitor products.
- Drywall Cut-Out Template Tool is available – simply slide into position and cut.
- Direct load transfer to the top of the frame wall.
- The only patented high-capacity, galvanized Firewall Hanger.
- Skewed options up to 70 degrees. Drywall installation requires only a narrow slot. No fire caulking or notching is required.
- Available upon request for beams and purlins with load carrying capacities over 7000 lbs.

2015 & 2018 IBC, FL, LABC Compliant

Patents: U.S. Patent No. 10,316,510, U.S. Patent No. 11,021,867 B2