


1. THIS REPAIR IS TO BE USED FOR SINGLE PLY TRUSSES IN THE 4X_o ORIENTATION ONLY.
2. MINIMUM CHORD LUMBER SPECIFIC GRAVITY = 0.42 (SPF)
3. MAXIMUM LENGTH OF MISSING SECTION IS 6".
4. THE END DISTANCE, EDGE DISTANCE, AND SPACING OF NAILS SHALL BE SUCH AS TO AVOID SPLITTING OF THE WOOD.
5. CONNECTOR PLATES MUST BE FULLY IMBEDDED AND UNDISTURBED.
6. THIS IS A SPECIFIC REPAIR DETAIL TO BE USED ONLY FOR ITS ORIGINAL INTENTION. THIS REPAIR DOES NOT IMPLY THAT THE REMAINING PORTION OF THE TRUSS IS UNDAMAGED. THE ENTIRE TRUSS SHALL BE INSPECTED TO VERIFY THAT NO FURTHER REPAIRS ARE REQUIRED. WHEN THE REQUIRED REPAIRS ARE PROPERLY APPLIED, THE TRUSS WILL BE CAPABLE OF SUPPORTING THE LOADS INDICATED.

REFER TO INDIVIDUAL TRUSS DESIGN FOR PLATE SIZES, LUMBER GRADES AND FORCE IN PANEL TO BE REPAIRED APPLICABLE FOR WOOD OR METAL WEB TRUSSES.

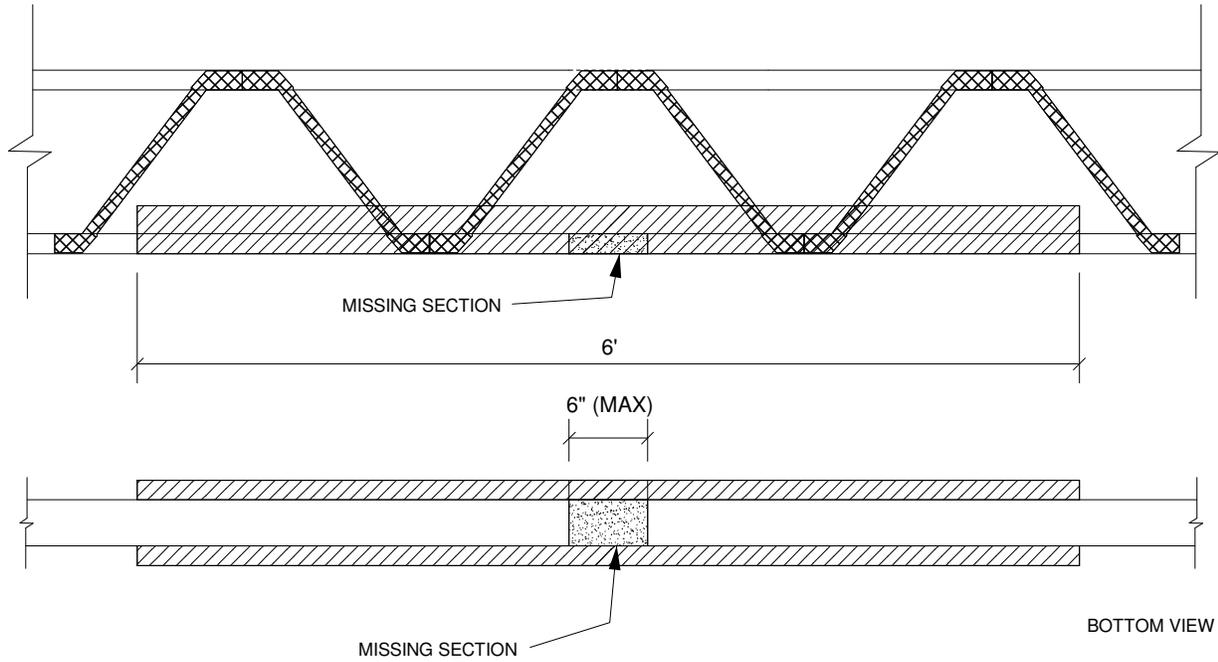

APPLY 2X4X6' SCAB TO BOTH SIDES OF TRUSS CENTERED ON DAMAGE WITH CONSTRUCTION QUALITY ADHESIVE AND 1 ROW OF 10d (0.131" X 3") NAILS SPACED 3" O.C. FROM EACH FACE. SCAB GRADE AND SPECIES TO MATCH EXISTING BOTTOM CHORD.

MAXIMUM ALLOWABLE CHORD FORCE AT DAMAGE LOCATION	
SP	2120
SPF	1640
DF	1940
HF	1680