


MiTek USA, Inc.






LOADING (PSF)

TCLL	30.0
TCDL	10.0
BCLL	0.0
BCDL	10.0

LEDGER CAPACITY BASED ON SPF LUMBER

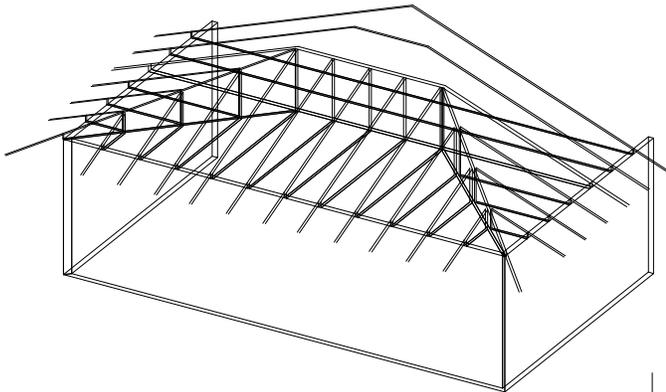

NOTE: MAXIMUM 1/4" GAP ALLOWED BETWEEN END VERTICAL AND GIRDER TRUSS

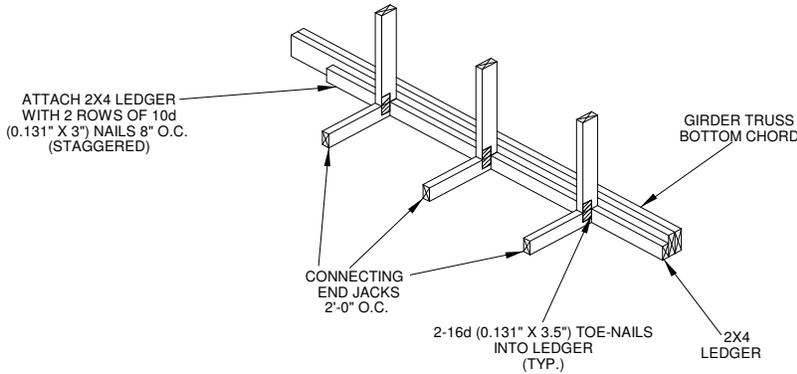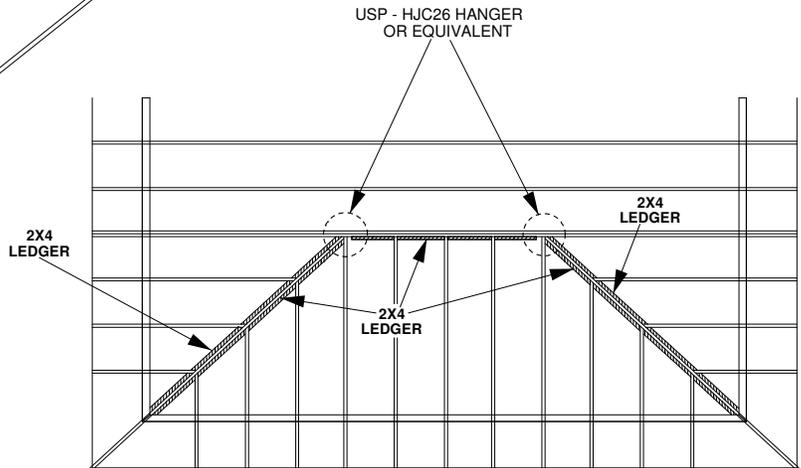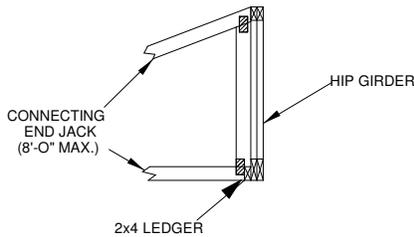

- MAX MEAN ROOF HEIGHT = 30 FEET
- CATEGORY II BUILDING
- EXPOSURE B or C
- ASCE 7-98, ASCE 7-02, ASCE 7-05 120 MPH (MWFRS)
- ASCE 7-10 150 MPH (MWFRS)
- WIND DURATION OF LOAD INCREASE : 1.60
- MAX TRUSS SPACING = 24" O.C.
- MAX STUD SPACING = 24" O.C.
- MINIMUM PITCH 3/12
- MAXIMUM PITCH 12/12