


MiTek USA, Inc.

2 x UPLIFT LEDGER. SECURE TO GIRDER TRUSS WITH CONSTRUCTION QUALITY ADHESIVE AND 10d (0.131" X 3") NAILS AS FOLLOWS:

SINGLE TOP CHORD - 1 ROW @ 3" O.C.

DOUBLE TOP CHORD - 2 ROWS @ 3" O.C. (1 ROW IN EACH CHORD MEMBER)

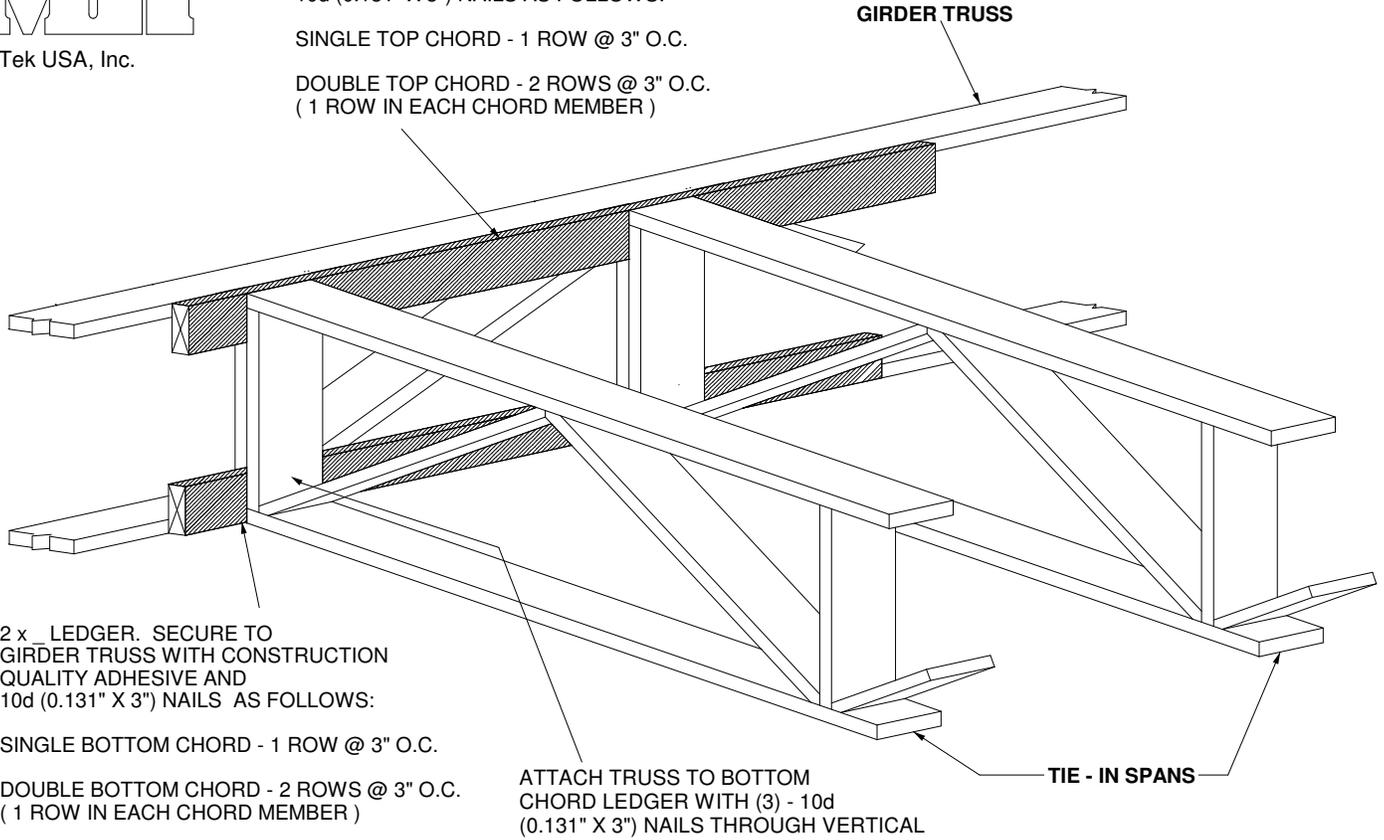

2 x LEDGER. SECURE TO GIRDER TRUSS WITH CONSTRUCTION QUALITY ADHESIVE AND 10d (0.131" X 3") NAILS AS FOLLOWS:

SINGLE BOTTOM CHORD - 1 ROW @ 3" O.C.

DOUBLE BOTTOM CHORD - 2 ROWS @ 3" O.C. (1 ROW IN EACH CHORD MEMBER)

ATTACH TRUSS TO BOTTOM CHORD LEDGER WITH (3) - 10d (0.131" X 3") NAILS THROUGH VERTICAL

TIE - IN SPANS

	MAX. LOAD APPLIED TO LEDGER (PLF)		
	SP	DOUG-FIR	SPF/HF
SINGLE CHORD	404	372	316
DOUBLE CHORD	808	744	632

NOTE: VALUES BASED ON FOLLOWING VALUES
 SP = 101#/nail
 DF = 93#/nail
 SPF = 79#/nail